



Karnataka State Pollution Control Board

HEAD OFFICE : “Parisara Bhavan”,
No.49, Church Street, Bengaluru-560001
Tel No: 080-25589112/113, 080-25581383/388,
Website: <https://kspcb.karnataka.gov.in>

ZONAL OFFICE : Bengaluru East
Nisarga Bhavan 3rd Floor, Thimmaiah Road, 7th D
Main, Shivanagar, Bengaluru-560010
Tele : 080-23228859

Consent For Operation(CFO-Air,Water) - (CfO-Re Apply)

As per the provisions of
The Water (Prevention & Control of Pollution) Act, 1974
&
The Air (Prevention & Control of Pollution) Act, 1981

To

Optifuel Industry, Jadigenahali Hobli, Hoskote taluk

for the Facility located at,

Optifuel Industry, Sy. No. 69/2, Hunasehalli Village ,Jadigenahali Hobli, Hoskote taluk

Bangalore Rural

Consent Order No	PCBID	INW ID	Industry Colour/Scale	Date of Issue
W-353070	249169	341472	ORANGE/SMALL	06/03/2026

This Consent is granted for the Products/ Activity/Service name indicated in the annexure along with the terms & conditions attached to this order

Validity through : 21/10/2025 to 30/09/2035

Combined Consent Order No: W-353070

PCB ID: 249169

GSC No : PBOXG0000331472

Date: 06/03/2026

Combined consent for discharge of effluents under the Water (Prevention and Control of Pollution) Act , 1974 and emission under Air (Prevention and Control of Pollution)Act , 1981

Ref: 1. Application filed by the industry / organization on 10/10/2025
2. Inspection of the Industry/organization/by RO, on 18/10/2025

Consent is hereby granted under Section 25(4) of the Water (Prevention & Control of Pollution) Act, 1974 (herein referred to as the Water Act) & Section 21 of Air (Prevention & Control of Pollution) Act, 1981, (here in referred to as the Air Act) and the Rules and Orders made there under and subject to the terms and conditions as detailed in the Schedule Annexed to this order.

The Occupier is authorized to operate /carryout industry/activity & to make discharge of the effluents & emissions confirming to the stipulated standards from the premises mentioned below:

Location:

Name of the Industry: Optifuel Industry

Address: Sy. No. 69/2, Hunasehalli Village, Jadigenahali Hobli, Hoskote taluk

Industrial Area: Not In I.A, Hunasehalli Village,

Taluk: Hoskote, District: Bangalore Rural

Discharge of effluents under the Water Act:

Sr	Water Code	WC(KLD)	WWG(KLD)	Remark
1	Domestic Purpose	0.450	0.360	Sewage generated from the industry shall be treated in the septic tank and soak pit

Discharge of Air emissions under the Air Act from the following stacks etc.

Sl. No.	Description of chimney/outlet	Limits specified refer schedule
The details of Sources, control equipments and its specification, type of fuel, rate of emissions, constituents to be controlled in emissions etc. are detailed in Annexure-I.		

The consent for operation is granted considering the following activities/Products;

Sr	Product Name	Applied Qty	Unit
1	Manufacture of Biodiesel (B-100) and Glycerin	450.0000	Metric Tonnes/month

This consent is valid for the period from 21/10/2025 to 30/09/2035

To,

Optifuel Industry

No. 7/2, Main Road, S K Garden, Benson
Town Post, Bangalore, 560046,

NOTE:

The following Conditions mentioned above are not applicable.

COPY TO:

1. The Regional Officer, **Hoskote** for information and necessary action.
2. Master Register.
3. Case file.

Consent Fee paid : Rs. 30000

SCHEDULE**TERMS AND CONDITIONS****A. TREATMENT AND DISPOSAL OF EFFLUENTS UNDER THE WATER ACT.**

1. The discharge from the premises of the occupier shall pass through the terminal manhole/manholes where there under. from
- 2(a). The sewage/domestic effluent shall be treated in septic tank and with soak pit. No overflow from the soak pit is allowed. The septic tank and soak pit shall be as per IS 2470 Part-I & Part-II.
- 2(b).The treated sewage effluent discharged shall conform to the standards specified in Annexure-I.
- 3(a). The trade effluent generated in the industry shall be treated in the ETP and treated effluent shall confirm to the standards stipulated by the Board in Annexure-1
- 3(b).The trade effluent shall be handed over to CETP and maintain logbook of effluent generated & sent every day.

Additional Conditions:

- CFO is issued as per Board Office Review Order No. 5061 Dated: 23.06.2026.
- The industry shall not generate any type of trade effluent from the process.
- The industry shall not discharge of any type of effluent outside the premises at any point of time.
- The industry shall not install any air pollution sources in the premises.
- The industry shall provide dyke wall to the storage tank before commission of the industrial activity.
- The industry shall obtain necessary permission from the competent authority before going for production of the products.
- The industry shall submit permission letter issued by the competent authority for the storage of methanol, glycerin and bio-diesel in the premises.
- There shall not be any complaint against the unit with regard to pollution issues due to operation of the plant, if found, the industry authority shall sort out the issue or else the industry authority shall stop the operation/shift the plant from the premises, if the complaint persists.
- The conditions No. A. 2(b) 2(c) 3(a) & 3(b) are not applicable.



4. The occupier shall install flow measuring/recording devices to record the discharge quantity and maintain the record.
5. The occupier shall not change or alter either the quality or the quantity or the place of discharge or temperature or the point of discharge without the previous consent/ permission of the Board.
6. The Occupier shall not allow the discharge from the other premises to mix with the discharge from his premises Storm water shall not be allowed to mix with the effluents on the upstream of the terminal manhole where the flow measuring devices are installed.

B. EMISSIONS:

1. The discharge of emissions from the premises of the applicant shall pass through the air pollution control equipment and discharged through stacks/chimneys mentioned in **Annexure-II** where from the Board shall be free to collect the samples at any time in accordance with the provisions of the Act and Rules made there under.
2. The occupier shall provide port holes for sampling of emission, access platforms for carrying out stack sampling, electrical points and all other necessary arrangements including ladder as indicated in Annexure-II.
3. The Occupier shall upgrade/modify/replace the control equipment with prior permission of the Board.

C.MONITORING & REPORTING:

1. The occupier shall get the samples of effluents & emissions collected and get them analyzed once a month for the parameters.

D. SOLID WASTE (OTHER THAN HAZARDOUS WASTE) DISPOSAL:

1. The Occupier shall segregate solid waste from Hazardous Waste, Municipal Solid Waste and store it properly till treatment/disposal without causing pollution to the surrounding Environment.
2. The solid waste generated shall be handled & disposed by scientific method without causing eye sore to the general public and to the surrounding environment.

E. NOISE POLLUTION CONTROL:

The applicant shall ensure that the ambient noise levels within its premises during construction and during operational period shall not exceed w.r.t Area/Zone as per Noise Pollution (Regulation and Control) Rules, 2000 as mentioned below:-

- a) In Industrial Area 75 dB(A) Leq during day time and 70 dB(A) Leq during night time.
- b) In Commercial Area 65 dB(A) Leq during day time and 55 dB(A) Leq during night time.
- c) In Residential Area 55 dB(A) Leq during day time and 45 dB(A) Leq during night time.
- d) In Silence Zone 50 dB(A) Leq during day time and 40 dB(A) Leq during night time.

Note: - * Day time shall mean 6 am to 10 pm and Night time shall mean 10 pm to 6 am.

- * dB(A) Leq denotes the time weighted average of the level of sound in decibels on scale A which is relatable to human hearing.
- * A "decibel" is a unit in which noise is measured.
- * "A", in dB(A) Leq, denotes the frequency weighting in the measurement of noise and corresponds to frequency response characteristics of the human ear.
- * Leq: It is an energy mean of the noise level over a specified period.

F. GENERAL CONDITIONS:

1. The applicant shall obtain prior permission from the competent authority for drawing of water from Surface/Ground water source and submit a copy of the same to the Board.
2. The Board reserves the right to review, impose additional conditions, revoke, change or alter terms and conditions of this consent.
3. The Occupier shall forthwith keep the Board informed of any accidental discharge of emissions/effluents into the atmosphere in excess of the standards laid down by the Board. The applicant shall also take corrective steps to mitigate the impact.
4. The Occupier shall provide alternative power supply sufficient to operate all Pollution control equipments.
5. The entire premises shall always be kept clean. The effluent holding area, inspection chambers, outlets, flow measuring points should made easily approachable.
6. The Occupier shall display the consent granted in a prominent place for perusal of the inspecting officers of the Board.
7. The Occupier his heirs, legal representatives or assigns shall have no claims what so ever to the continuation or renewal of this consent after expiry of the validity of consent.
8. The Occupier shall make an application for consent at least 120 days before expiry of this consent.
9. The occupier shall maintain register recording the ambient air quality and stack monitoring. The register shall be open for inspection by the Board Officers at all time.

Note: All efforts should be made to remove colour and unpleasant odour as far as practicable.

Annexure-II

Chim. No.	Chimney attached to	KVA Rating/ Capacity	Minimum chimney height to be provided above ground level (in Mtr)	Constituents to be controlled in the emission	Tolerance limits mg/NM3	Air pollution Control equipment to be installed, in addition to chimney height as per col.(4)	Date on which air pollution control equipments shall be provided to achieve the stipulated tolerance limits and chimney heights conforming to stipulated heights.
1	D.G. Sets	125KVA DG set	1	PM,SO ₂ ,NO _x	0,0,0,0,0	PRT	---

Note:

PRT : Port Hole

Note:

1. The DG set shall be provided with acoustic measures as per SI.No.94 in Schedule-I of Environment (Protection) Rules.
2. There shall be no smell or odour nuisance from the industry.


LOCATION OF SAMPLING PORTHOLES, THE PLATFORMS, THE ELECTRICAL OUTLET.

1. Location of Portholes and approach platform:

Portholes shall be provided for all chimneys, stacks and other sources of emission. These shall serve as the sampling points. The sampling point should be located at a distance equal to atleast eight times the stack or duct diameters downstream and two diameters upstream from source of low disturbance such as a Bend, Expansion, Construction Valve, Fitting or Visible Flame for rectangular stacks, the equivalent diameter can be calculated from the following equation.

$$\text{Equivalent Diameter} = \frac{2 (\text{Length} \times \text{Width})}{(\text{Length} + \text{Width})}$$

2. The diameter of the sampling port should not be less than 3". Arrangements should be made so that the porthole is closed firmly during the period when it is not used for sampling.
3. An easily accessible platform to accommodate 3 to 4 persons to conveniently monitor the stack emission from the portholes shall be provided. Arrangements for an Electric Outlet Point off 230 V 15 A with suitable switch control and 3 Pin Point shall be provided at the Porthole location.

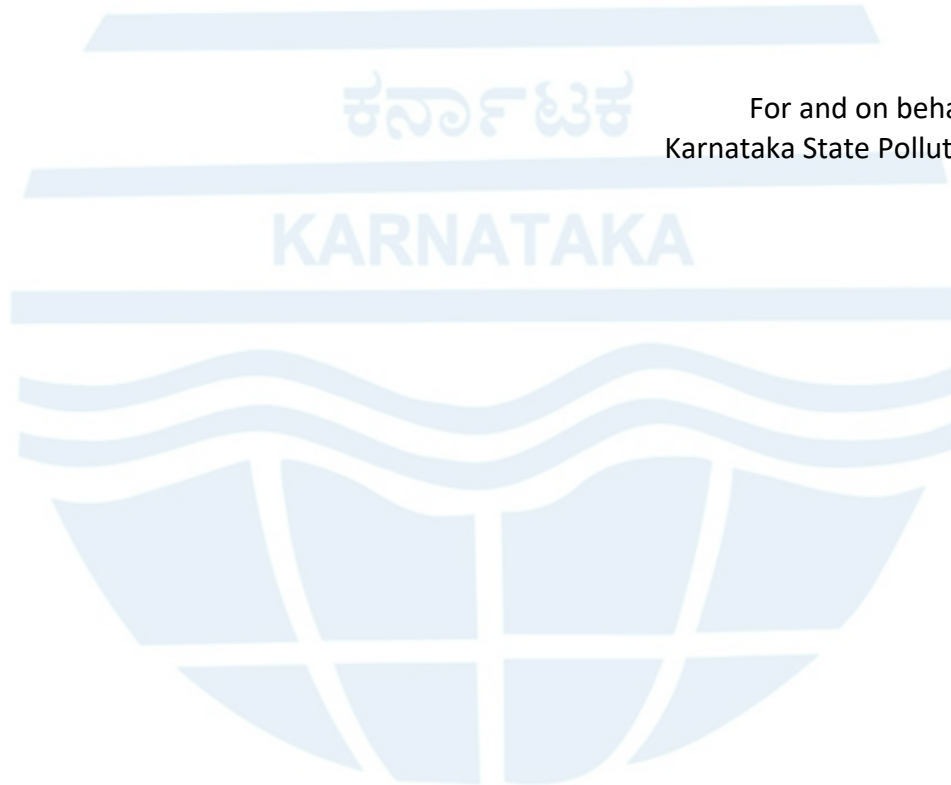

For and on behalf of the
Karnataka State Pollution Control Board